



## 舗装工数量計算書

測点	距離 (m)	不陸修正			車道表層(5cm)								
		長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )
NO. 0		8.93			8.93								
NO. 1	20.00	7.35	8.14	162.80	7.35	8.14	162.80						
NO. 1 + 9.8	9.80	5.03	6.19	60.66	5.03	6.19	60.66						
NO. 2	10.20	5.03	5.03	51.31	5.03	5.03	51.31						
NO. 3	20.00	5.08	5.06	101.10	5.08	5.06	101.10						
NO. 4	20.00	5.02	5.05	101.00	5.02	5.05	101.00						
NO. 5	20.00	5.03	5.03	100.50	5.03	5.03	100.50						
NO. 6	20.00	5.01	5.02	100.40	5.01	5.02	100.40						
NO. 7	20.00	5.05	5.03	100.60	5.05	5.03	100.60						
NO. 8	20.00	5.08	5.07	101.30	5.08	5.07	101.30						
NO. 9	20.00	5.05	5.07	101.30	5.05	5.07	101.30						
NO. 10	20.00	5.05	5.05	101.00	5.05	5.05	101.00						
NO. 11	20.00	5.02	5.04	100.70	5.02	5.04	100.70						
NO. 12	20.00	6.07	5.55	110.90	6.07	5.55	110.90						
NO. 12 + 5.6	5.60	5.74	5.91	33.07	5.74	5.91	33.07						
NO. 12 + 11.9	6.30	5.64	5.69	35.85	5.64	5.69	35.85						
NO. 13	8.10	6.31	5.98	48.40	6.31	5.98	48.40						
NO. 13 + 4.0	4.00	6.18	6.25	24.98	6.18	6.25	24.98						
NO. 13 + 11.5	7.50	6.31	6.25	46.84	6.31	6.25	46.84						
小計				1482.70			1482.70						

# 舗装工数量計算書

測点	距離 (m)	不陸修正			車道表層(5cm)								
		長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )
NO. 13 + 11.5		6.31			6.31								
NO. 13 + 18.0	6.50	7.71	7.01	45.57	7.71	7.01	45.57						
小計				45.57			45.57						
合計				1528.26			1528.26						





## As 舗装取壊工数量計算書

測点	距離 (m)	As舗装取壊(t=5cm)											
		長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )
NO. 0		8.93											
NO. 1	20.00	7.35	8.14	162.80									
NO. 1 + 9.8	9.80	5.03	6.19	60.66									
NO. 2	10.20	5.03	5.03	51.31									
NO. 3	20.00	5.08	5.06	101.10									
NO. 4	20.00	5.02	5.05	101.00									
NO. 5	20.00	5.03	5.03	100.50									
NO. 6	20.00	5.01	5.02	100.40									
NO. 7	20.00	5.05	5.03	100.60									
NO. 8	20.00	5.08	5.07	101.30									
NO. 9	20.00	5.05	5.07	101.30									
NO. 10	20.00	5.05	5.05	101.00									
NO. 11	20.00	5.02	5.04	100.70									
NO. 12	20.00	6.07	5.55	110.90									
NO. 12 + 5.6	5.60	5.74	5.91	33.07									
NO. 12 + 11.9	6.30	5.64	5.69	35.85									
NO. 13	8.10	6.31	5.98	48.40									
NO. 13 + 4.0	4.00	6.18	6.25	24.98									
NO. 13 + 11.5	7.50	6.31	6.25	46.84									
小計				1482.70									

## As 舗装取壊工数量計算書

測点	距離 (m)	As舗装取壊(t=5cm)											
		長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )
NO. 13 + 11.5		6.31											
NO. 13 + 18.0	6.50	7.71	7.01	45.57									
コンクリート舗装部				-10.49									
小計				35.08									
合計				1517.77									

## Co 舗装取壊工数量計算書

測点	距離 (m)	Co舗装取壊(t=5cm)											
		幅(m)	平均	面積(m <sup>2</sup> )									
				10.49	(舗装面積求積表)								
合 計				10.49									







# 数 量 総 括 表

B、C（上大久保下大久保線）

工 種	種 別	細 目	規 格	単 位	数 量	摘 要
舗 装 工	不 陸 整 正			m2	690	
	As 舗 装	表 層	t=5cm	〃	690	
		路 盤	RM-30 t=15cm	〃	13	
構造物撤去工	舗装版切断		t=5cm	m	22	
	As舗装取壊		t=5cm	m2	690	
	運搬処理工	アスファルト殻運搬処理		m3	34	
土 工	掘 削	土 砂	( W < 5.0m )	m3	4	
	盛 土	土 砂		〃	2	
	残土処理工			〃	10	
水 路 工	作 業 土 工	床 掘	( 土 砂 )	m3	63	
		埋 戻	( 土 砂 )	〃	44	
	コンクリート水路		標準品 (400×500)	m	10	
			落差工 (400×500)	〃	22.5	
	管 渠 工		台 付 管 φ 450	〃	8.0	
	集 水 柵			箇所	1	
構造物撤去工	構造物取壊工	コンクリート構造物取壊	HP φ 450	m	8.0	
			集水柵	箇所	1	
		コンクリート取壊運搬処理		m3	1	



## 舗装工数量計算書

測点	距離 (m)	不陸整正			車道表層(5cm)			車道路盤(15cm)			長さ(m)	平均	数量(m <sup>2</sup> )
		長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )			
NO. 0		4.30			4.30								
NO. 0 + 8.1	8.10	4.36	4.33	35.07	4.36	4.33	35.07						
NO. 0 + 8.1	0.00	4.23			4.23								
NO. 0 + 9.1	1.00	4.23	4.23	4.23	4.23	4.23	4.23						
NO. 0 + 9.1	0.00	4.47			4.47								
NO. 0 + 10.9	1.80	4.66	4.57	8.22	4.66	4.57	8.22						
NO. 0 + 15.6	4.70	4.27	4.47	20.99	4.27	4.47	20.99						
NO. 0 + 7.2	7.20							4.35					
NO. 0 + 8.1	0.90							4.36	4.36	3.92			
NO. 0 + 8.1	0.00							4.23	4.30	0.00			
NO. 0 + 9.1	1.00							4.23	4.23	4.23			
NO. 0 + 9.1	0.00							4.47	4.35	0.00			
NO. 0 + 10.2	1.10							4.58	4.53	4.98			
合計				68.51			68.51			13.13			









# 土 工 計 算 書


測点	距離 (m)	掘削(土砂)(W<5m)			盛 土								
		断面積(m <sup>2</sup> )	平均	数量(m <sup>3</sup> )	断面積(m <sup>2</sup> )	平均	数量(m <sup>3</sup> )	断面積(m <sup>2</sup> )	平均	数量(m <sup>3</sup> )	断面積(m <sup>2</sup> )	平均	数量(m <sup>3</sup> )
ANO.0		0.0			0.0								
ANO.0+10.0	10.00	0.0	0.00	0.0	0.2	0.10	1.0						
ANO.1	10.00	0.1	0.05	0.5	0.0	0.10	1.0						
ANO.1+10.0	10.00	0.5	0.30	3.0	0.1	0.05	0.5						
EP	1.60	0.5	0.50	0.8	0.1	0.10	0.1						
小 計				4.3			2.6						






# 作業土工

コンクリート水路  
(標準品400×500)

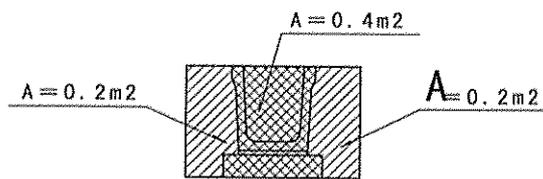


床堀 :  $A = 0.2 + 0.4 + 0.2 = 0.8 \text{ m}^2$   
埋戻 :  $A = 0.2 + 0.2 = 0.4 \text{ m}^2$

コンクリート水路  
(落差工400×500)

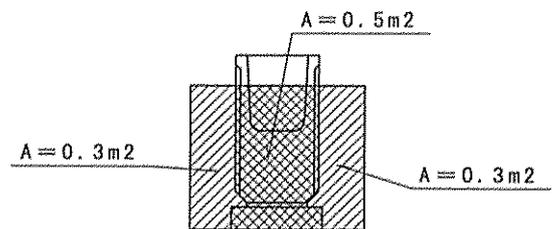


床堀 :  $A = 0.3 + 0.5 + 0.3 = 1.1 \text{ m}^2$   
埋戻 :  $A = 0.3 + 0.3 = 0.6 \text{ m}^2$

台付管 (φ450)

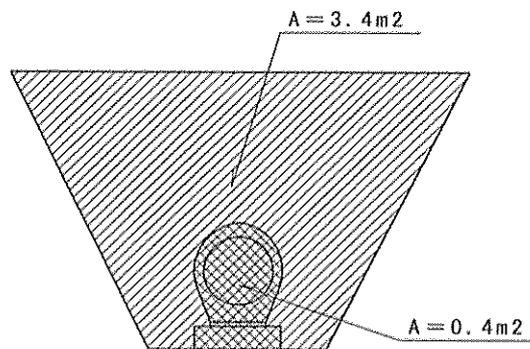


床堀 :  $A = 3.4 + 0.4 = 3.8 \text{ m}^2$   
埋戻 :  $A = 3.4 \text{ m}^2$

# コンクリート水路 (標準品400×500)

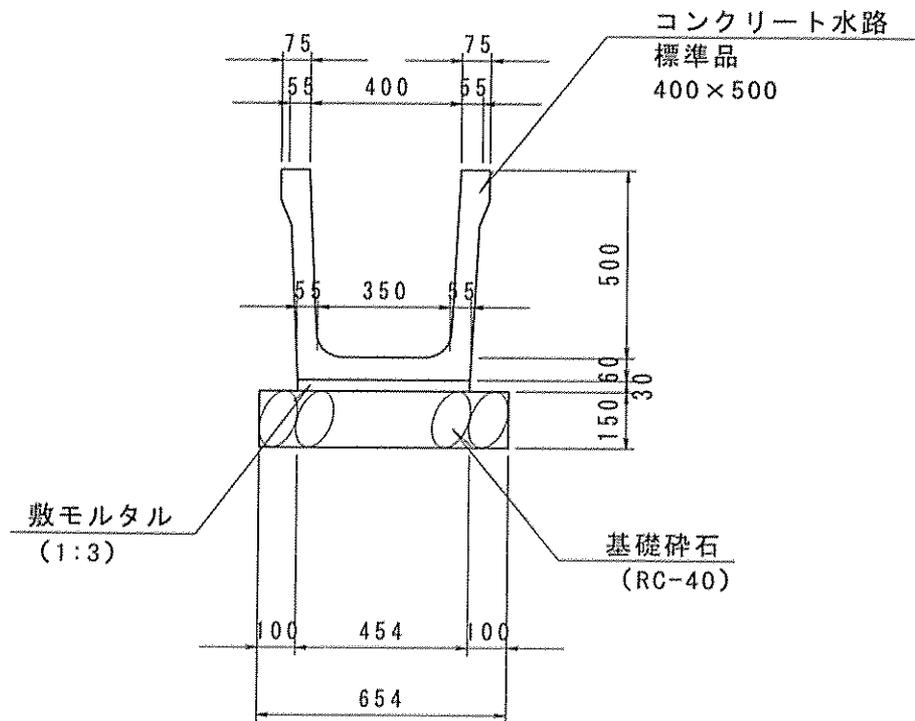




# コンクリート水路 (落差工400×500)

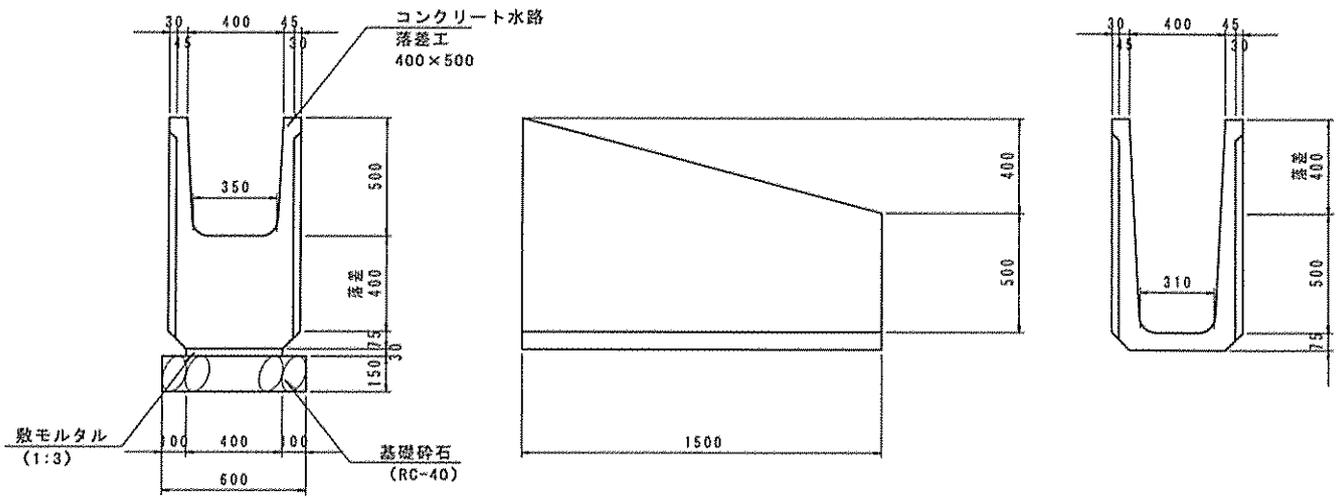




# 台付管 (φ450)

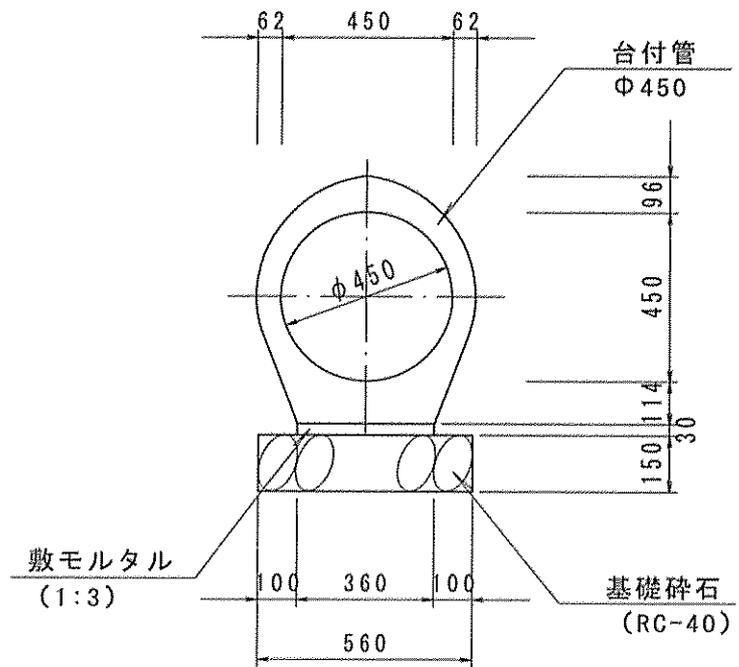




# 集水枿

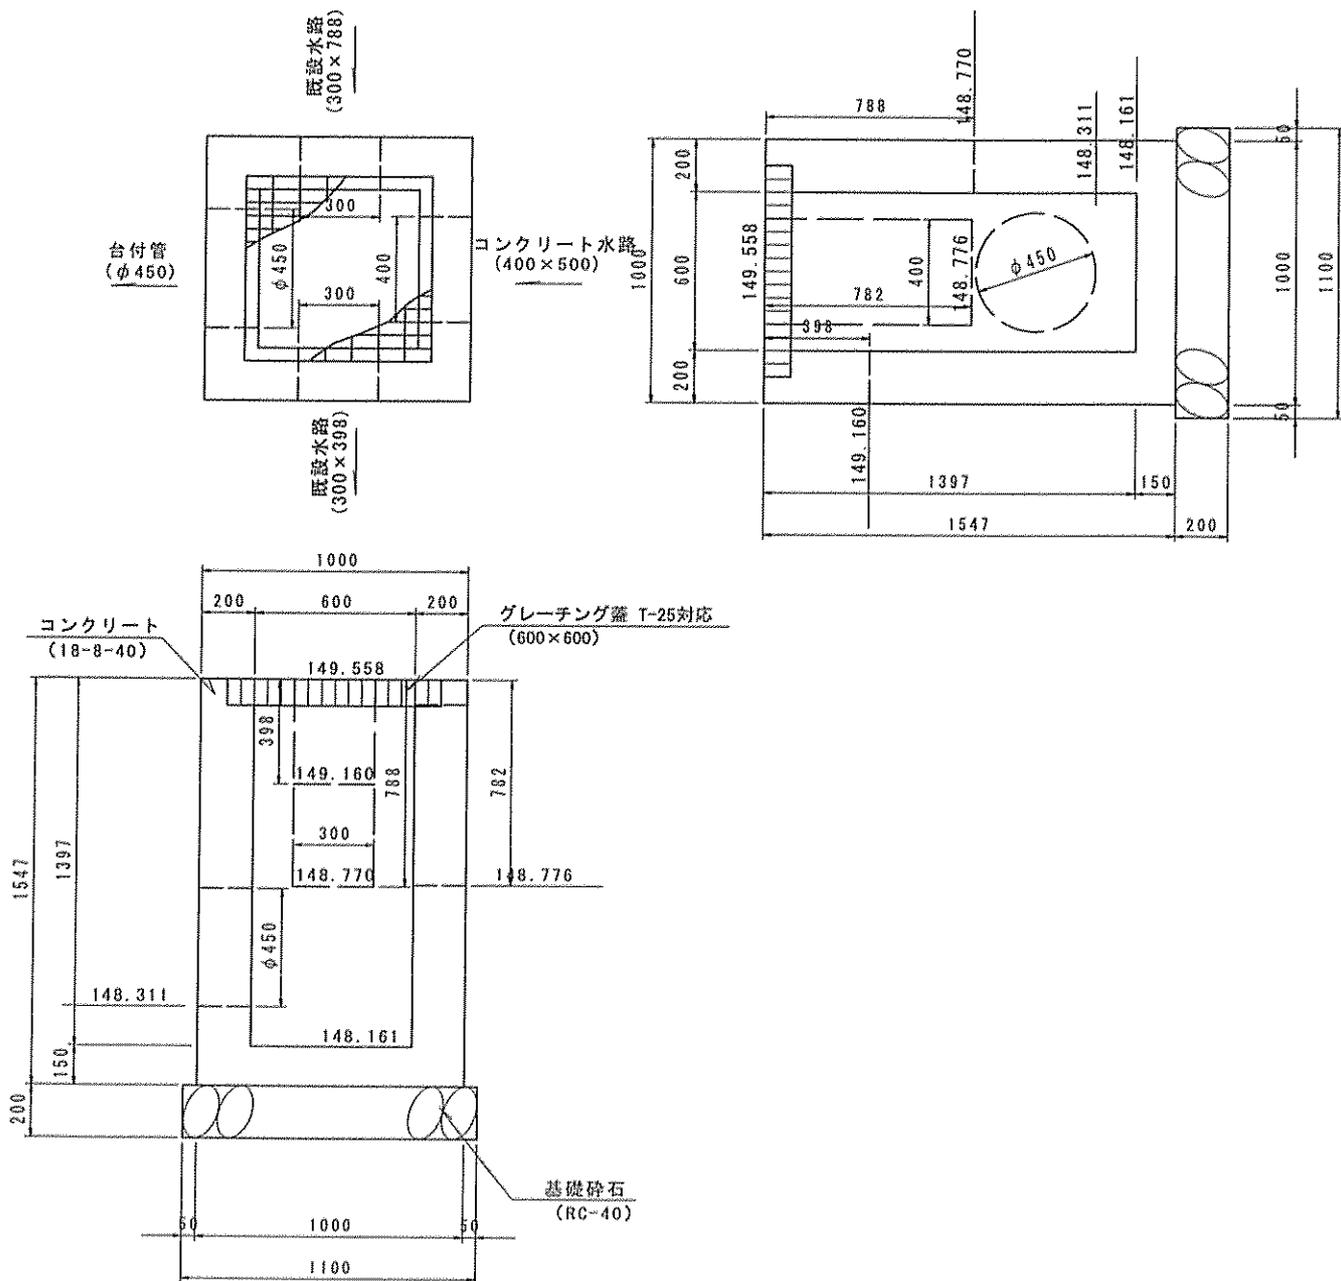




# 構造物取壊工 (HP $\phi 450$ )

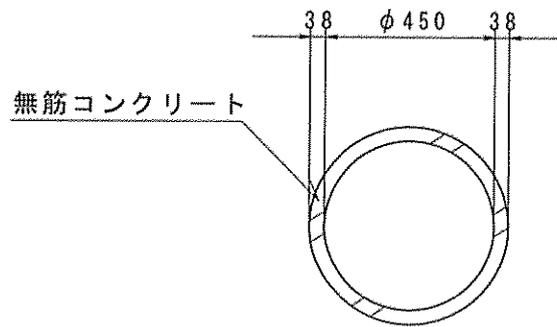



# 構造物取壊工 (集水桝)

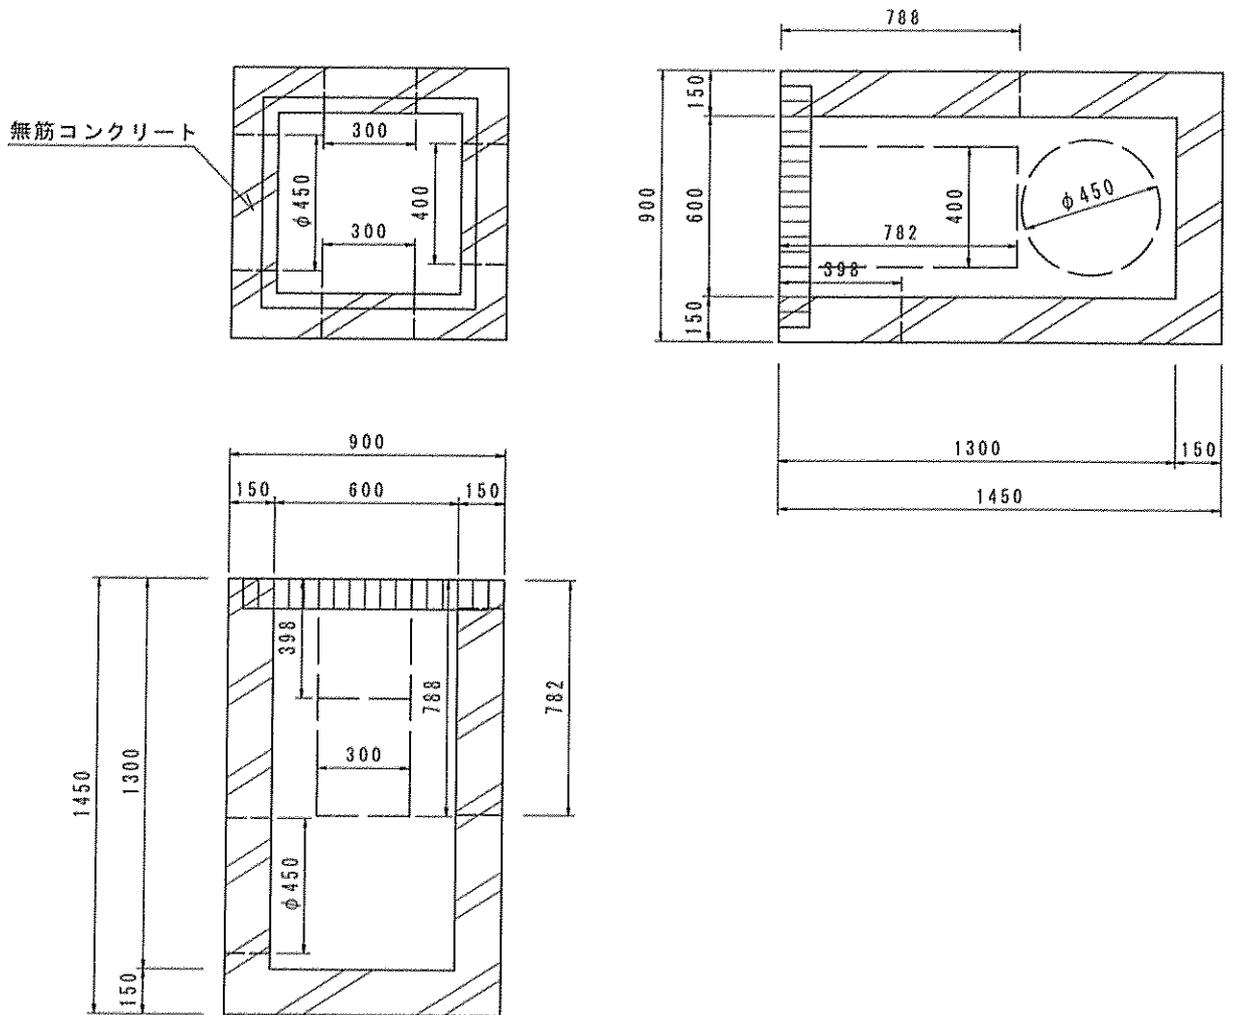







## 舗装工数量計算書

測点	距離 (m)	不陸整正			車道表層(5cm)								
		長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )
NO. 18 + 11.0		4.36			4.36								
NO. 19	9.00	4.65	4.51	40.55	4.65	4.51	40.55						
NO. 20	20.00	4.72	4.69	93.70	4.72	4.69	93.70						
NO. 20 + 2.1	2.10	4.73	4.73	9.92	4.73	4.73	9.92						
NO. 20 + 2.4	0.30	5.73	5.23	1.57	5.73	5.23	1.57						
NO. 20 + 7.4	5.00	5.76	5.75	28.73	5.76	5.75	28.73						
NO. 20 + 9.2	1.80	4.77	5.27	9.48	4.77	5.27	9.48						
NO. 21	10.80	4.92	4.85	52.33	4.92	4.85	52.33						
NO. 22	20.00	4.65	4.79	95.70	4.65	4.79	95.70						
NO. 23	20.00	4.53	4.59	91.80	4.53	4.59	91.80						
NO. 24	20.00	4.09	4.31	86.20	4.09	4.31	86.20						
NO. 25	20.00	4.14	4.12	82.30	4.14	4.12	82.30						
NO. 25 + 8.4	8.40	5.03	4.59	38.51	5.03	4.59	38.51						
合計				630.78			630.78						



## As 舗装取壊工数量計算書

測点	距離 (m)	As舗装取壊(t=5cm)											
		長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )	長さ(m)	平均	数量(m <sup>2</sup> )
NO. 18 + 11.0		4.36											
NO. 19	9.00	4.65	4.51	40.55									
NO. 20	20.00	4.72	4.69	93.70									
NO. 20 + 2.1	2.10	4.73	4.73	9.92									
NO. 20 + 2.4	0.30	5.73	5.23	1.57									
NO. 20 + 7.4	5.00	5.76	5.75	28.73									
NO. 20 + 9.2	1.80	4.77	5.27	9.48									
NO. 21	10.80	4.92	4.85	52.33									
NO. 22	20.00	4.65	4.79	95.70									
NO. 23	20.00	4.53	4.59	91.80									
NO. 24	20.00	4.09	4.31	86.20									
NO. 25	20.00	4.14	4.12	82.30									
NO. 25 + 8.4	8.40	5.03	4.59	38.51									
合計				630.78									

